QuickSpecs

Overview

HPE Smart Array P408i-p SR Gen10 Controller

The HPE Smart Array P408i-p SR Gen10 Controller, supporting 12Gb/s SAS and PCIe 3.0, is ideal for maximizing performance while supporting advanced RAID levels with 2 GB flash-backed write cache (FBWC). This controller operates in Mixed Mode which combines RAID and HBA operations simultaneously. It has eight internal SAS lanes, allowing connection to SAS or SATA drives, and provides enterprise-class storage performance, reliability, security and efficiency needed to address your evolving data storage needs. This controller offers enhanced security by encrypting data-at-rest on any drive with HPE Smart Array SR Secure Encryption.



Model

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller	
Kit Contents: P408i-p controller, high profile bracket, and low profile bracket.	

Options Sold Separately

HPE 96W Smart Storage Battery (up to 20 Devices/145mm Cable) Kit		
HPE 96W Smart Storage Battery (up to 20 Devices/260mm Cable) Kit	875242-B21	
HPE 12W Smart Storage Battery (up to 3 Devices) for Apollo XL230k Gen10 Server	875240-B21	

NOTE: P408i-p controller requires the HPE Smart Storage Battery, which supports multiple devices and is sold separately. **NOTE:** The 875242-B21 (96W with 260mm Cable) is only used with the ML350 Gen10, and the 12W battery is used with the XL230k Gen10, all other Gen10 servers use the 875241-B21 (96W with 145mm Cable).



Standard Features

Key Features	 Storage interface (SAS/SATA) 8 SAS lanes across 2 x4 internal Mini-SAS ports 12Gb/s SAS, 6Gb/s SATA technology Mix-and-match SAS and SATA drives to the same controller Support for SAS tape drives 2 GB Flash-Backed Write Cache (FBWC) PCI Express 3.0 x8 link RAID 0, 1, 5, 6, 10, 50, 60, 1 ADM, 10 ADM (Advanced Data Mirroring) Mixed Mode (RAID logic drives and HBA physical drives simultaneously) Windows Storage Spaces Direct validated VMware Virtual SAN certified Legacy and UEFI boot operation UEFI System Utilities (storage configuration) Up to 238 physical drives Up to 64 logical drives HPE Smart Array SR Secure Encryption (optional license) HPE SSD Smart Path Rapid Parity Initialization (RPI) Rapid rebuild Drive Sanitize Performance Optimization-Degraded Reads and Read Coalescing Power efficiency Seamless upgrades from HPE Smart Array S-class and E-class controllers FIPS 140-2 Level 1 Implementation Under Test (expected validation complete in 2018)
Ports	Internal: 8 SAS/SATA lanes across 2 x4 Mini-SAS ports
Form Factor	PCle Plug-in Controller (occupies a PCle expansion slot)
Performance	 12Gb/s SAS (1200 MB/s theoretical bandwidth per SAS lane) 6Gb/s SATA (600 MB/s theoretical bandwidth per SAS lane) PCI Express 3.0 x8 link width 2 GB 72-bit wide DDR4-2100 Flash-Backed Write Cache provides up to 16.8 GB/s maximum cache bandwidth Read ahead caching Write-back caching
Array Configuration Features	 Expand Array Heal Array Move Drives Re-Mirror Array Shrink Array Spare Management Split Mirrored Array
Logical Drive Configuration Features	 Extend Logical Drive Instant Secure Erase Migrate RAID/Stripe Size Modifying Cache Write Policy Move Logical Drive Re-enable Failed Logical Drive

Standard Features

Fault Prevention	The following features offer detection of possible failures before they occur, allowing preventive action to be taken:
	 Predictive drive failure detects possible drive failure before it occurs, allowing replacement of the component before failure occurs. Background surface scan checks drives during inactive periods and automatically remaps bad sectors, ensuring data integrity. HPE SmartSSD Wear Gauge reports the amount of lifetime remaining on your SSDs.
Fault Recovery	Minimizes downtime, reconstructs data, and facilitates a quick recovery from drive failure
	 Recovery ROM: This feature protects the user from a firmware image corruption by storing a redundant copy of the firmware image. If the active firmware image becomes corrupt, the controller will use the redundant firmware image and continue operating. On-Line Spares: There is no limit to the number of spare drives that can be installed prior to drive failure. If a failure occurs, recovery begins with an On-Line Spare and data is reconstructed automatically. DRAM ECC detects and corrects data bit errors
HPE SSD Smart Path	The HPE SSD Smart Path feature included in the Smart Array software stack improves Solid State Disk (SSD) read performance by up to 4x. HPE SSD Smart Path chooses the optimum path to the SSD and accelerates reads for all RAID levels and RAID 0 writes.
HPE Smart Array SR SmartCache (optional license)	The HPE Smart Array SR SmartCache feature is a controller-based read and write caching solution in a DAS environment that caches the most frequently accessed data ("hot" data) onto lower latency SSDs to dynamically accelerate application workloads. The SmartCache architecture is flexible and supports any HPE ProLiant Gen10 HDD for bulk storage and SSD as an accelerator. SmartCache is deployed and managed using the HPE Smart Storage Administrator (HPE SSA). SmartCache requires an optional license (see Related Options section below for more information on the license).
	For additional information please visit: <u>http://www.hpe.com/servers/smartcache</u> .
HPE Smart Array SR Secure Encryption (optional license)	HPE Smart Array SR Secure Encryption is a Smart Array controller-based data encryption solution that protects sensitive, mission critical data. This is an enterprise-class encryption solution for data-at-rest on any drives attached to the HPE Smart Array controllers including data on the controller cache. Secure Encryption requires an optional license per server (see Related Options for more information on the license).
	The solution is available for both local and remote key management mode deployments. Local Key Management Mode is focused on single server deployment where there is one Master key per controller that is managed by the user. Remote Key Management Mode is for enterprise wide deployments from just a few servers to thousands of servers.
	FIPS 140-2 Cryptographic Module Validation FIPS provides a security assurance level validation for cryptographic modules. HPE Smart Array P408i-p SR Gen10 Controller is a cryptographic module that is currently on the Validation Program FIPS 140-2 Implementation Under Test List. The Smart Array P408i-p SR Gen10 Controller is expected to complete FIPS 140-2 Level 1 Validation in 2018. The National Institute of Standards and Technology (NIST) issue the FIPS 140-2 requirements and standards for cryptography modules that include both hardware and software components.
	For more information on please visit: http://www.hpe.com/servers/secureencryption


Standard Features

WarrantyThe warranty for this device is 3 years parts only.Warranty Upgrade Options

- Response Upgrade on-site response from next business day to same day 4 hours.
- Coverage Extend hours of coverage from 9 hours x 5 days to 24 hours x 7 days.
- Duration Select duration of coverage for a period of 1, 3, or 5 years.
- Warranty upgrade options can come in the form of Care Packs, which are sold at the HPE System level to which this product attaches.

Naming Framework

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the **HPE Smart Array Gen10 Controllers Data Sheet.**

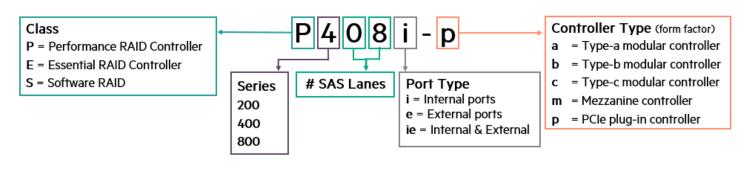

Compatibility

Server Support	HPE ProLiant DL360 Gen10 HPE ProLiant DL380 Gen10 HPE ProLiant DL560 Gen10 HPE ProLiant DL580 Gen10 HPE ProLiant ML110 Gen10 HPE ProLiant ML350 Gen10	HPE ProLiant XL170r Gen10 HPE ProLiant XL190r Gen10 HPE ProLiant XL230K Gen10
Operating Systems	Microsoft Windows Server Microsoft Windows Hyper-V Server VMware vSphere Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) CentOS ClearOS NOTE: HPE Smart Array controllers are supported information on HPE's server operating systems are http://www.hpe.com/info/ossupport	
Storage Management Software Suite	HPE Smart Storage Administrator (SSA) GUI HPE Smart Storage Administrator (SSA) CLI HPE Smart Storage Administrator (SSA) Scripting HPE Intelligent Provisioning UEFI System Utilities (storage configuration) UEFI Storage RESTful NOTE: For additional information see the HPE Sc http://www.hpe.com/info/SmartArrayGen10-d	mart Array SR Gen10 Configuration Guide at:

Service and Support

HPE Support Services	Protect your business beyond warranty with HPE Support Services HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.
Recommended Support	HPE Proactive Care* with 24x7 coverage, three year Support Service HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers. https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf
	HPE Proactive Care* with 6 hour call-to-repair commitment, three year Support Service HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years' proactive reporting and advice with our highest level of hardware support - HPE's 24x7, six hour hardware call- to-repair. HPE is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers. https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf
	*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.
HPE Education Services	Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <u>http://www.hpe.com/ww/learn</u>
HPE Support Center	The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.
	Learn more http://www.hpe.com/support/hpesc
	HPE's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.
	*HPE Support Center Mobile App is subject to local availability

Service and Support

Parts and materials	HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.
	Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.
	The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.
Related Services	HPE Server Hardware Installation Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf
	HPE Installation and Startup Service provides for the installation and startup of HPE technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows [®] or Linux).
	 NOTE: The Smart Array P408i-p SR Gen10 Controller is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased. Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support HERE.
Additional Service Information	http://www.hpe.com/services
HPE Smart Array Supporting Documents	For additional support documents, including and configuration guide and user guides, please visit: http://www.hpe.com/info/SmartArrayGen10-docs.

Related Options

HPE Smart Array SR SmartCache	HPE SmartCache No Media 24x7 Technical Support 1-server LTU Single-Server License Used to purchase a license for one server.	D7S26A
	Contains one license per server, a printed license entitlement certificate, end user license agreement, and license key installation card delivered via physical shipment . The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HPE Software Technical Support Services.	
	HPE SmartCache No Media 24x7 Technical Support Flexible LTU	D7S27A
	Flexible-Quantity License Used to purchase multiple licenses with a single activation key. Contains license(s) for a customer defined quantity of servers, a license entitlement certificate for the quantity of licenses purchased, end user license agreement, and license key installation card delivered via physical shipment . The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HPE Software Technical Support Services.	
	HPE SmartCache No Media 24x7 Technical Support E-LTU	D7S27AAE
	 Flexible-Quantity Electronic License Used to purchase multiple licenses with a single activation key. Contains license(s) for a customer defined quantity of servers, a license entitlement certificate for the quantity of licenses purchased, end user license agreement, and license key installation information delivered via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HPE Software Technical Support Services. NOTE: For more information please visit: http://www.hpe.com/servers/smartcache 	
HPE Smart Array SR	HPE Smart Array Secure Encryption/Data at Rest Encryption/per Server Entitlement	Q2F26AAE
Secure Encryption	E-LTU NOTE: HPE Smart Array SR Secure Encryption licensing is based on the number of servers requiring encryption for direct attached storage. NOTE: For more information visit: <u>http://www.hpe.com/servers/secureencryption</u>	
HPE Smart Storage Battery	HPE 96W Smart Storage Battery (up to 20 Devices/145mm Cable) Kit NOTE: 96W Battery with 145mm cable is for ProLiant Gen10 DL servers and the ProLiant XL170r, XL190r, and XL450 Gen10 servers.	875241-B21
	HPE 96W Smart Storage Battery (up to 20 Devices/260mm Cable) Kit NOTE: 96W Battery with 260mm cable is for ML110 and ML350 Gen10 servers.	875242-B21
	 HPE 12W Smart Storage Battery (up to 3 Devices) for Apollo XL230k Gen10 Server NOTE: For XL230k Gen10 servers. NOTE: Smart Array Gen10 controllers are supported by the HPE Smart Storage Battery, which supports multiple devices and is sold separately. 	875240-B21

Summary of Changes

Date	Version History	Action	Description of Change
25-Sep-2017	From Version 1 to 2	Added	Added compatibility with DL580, ML110, ML350, XL170r, XL190r, and XL450 Gen10 servers; Smart Storage Battery (260mm cable) as related option; VMware Virtual SAN certified; Windows Storage Spaces Direct validated; naming framework.
11-Jul-2017	Version 1	Added	New QuickSpecs.



Sign up for updates

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

a00008203ENW - 15925 - Worldwide - V2 - 25-September-2017

Hewlett Packard Enterprise