

CARD

SNMP Internal

SNMP1 Internal Card



Management Software Included

SNMP Internal

SNMP1 Internal Card

This SNMP Card bundled with advanced ViewPower software as an enhanced communication solution for UPS monitoring and management. This SNMP manager card allows remote monitor and manage multiple UPSs from anywhere with internet access. ViewPower software will leverage internet capability of SNMP manager to remotely program or shut down UPSs.


With the rapid growth of servers, workstations, telecommunication switching centers, and other centralized, large computing operations, the need for extremely large scale power management solutions is on the rise. Equipped with SNMP manager and installed with Viewpower software, power conditions of all UPSs can be monitored anytime/anywhere even though the UPS units are located in different floors. Besides, this card also comes equipped with easy-to-update firmware feature. Whenever the updated firmware is released, system manager can download it and simply upgrade all with one click.

SNMP Manager can operate with the environmental monitoring sensor to remotely monitor the environmental temperature, humidity, and smoke. This information can be allowed to trigger warning notification and auto shutdown.

Technical Specifications

Interfaces	RJ 45 10/100Mbps Base T Dry Contact Golden Finger (UPS)
LED	2
Supported Protocol	SNMP-V1 and SNMP-V2
Supported MIB	RFC 1213, RFC 1628, Custom MIB
Supported Software	ViewPower Pro
Supported OS	Windows XP/2K/Vista/7, Linux, MAC OS X
Supported UPS	A03-OP2301, A03-OP3451, A03-HP1101-RC, A03-HP1501-RC, A03-HP3351-RC
Advanced Features	<ul style="list-style-type: none"> • Allows control and monitoring of multiple UPSs through RJ-45 network connection • Real-time dynamic graphs of UPS data (voltage, frequency, load level, battery level) • Warning notifications via audible alarm, broadcast, mobile messenger, e-mail and SNMP traps • Historic data log stored in centralized PC database • Simple firmware upgrade with one click • Password security protection and remote access management • Optional Environmental Monitoring Detector (EMD) for temperature, humidity and smoke detection.
Power Consumption	12W (2 watt max) , Computer USB and RS232
Certifications	CE
Dimensions	48 x 15 x 23mm
Weight	35g
Temperature Range	0°-40° C
Humidity	0-90% (non-condensing)

All rights reserved. Microsoft and Windows are registered trademarks of Microsoft Corporation. Mac OS X is a trademark of Apple Inc. All trade names and marks are registered trademarks of respective companies. Specifications are subjected to change without prior notice. No liability for technical errors and/or omissions. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

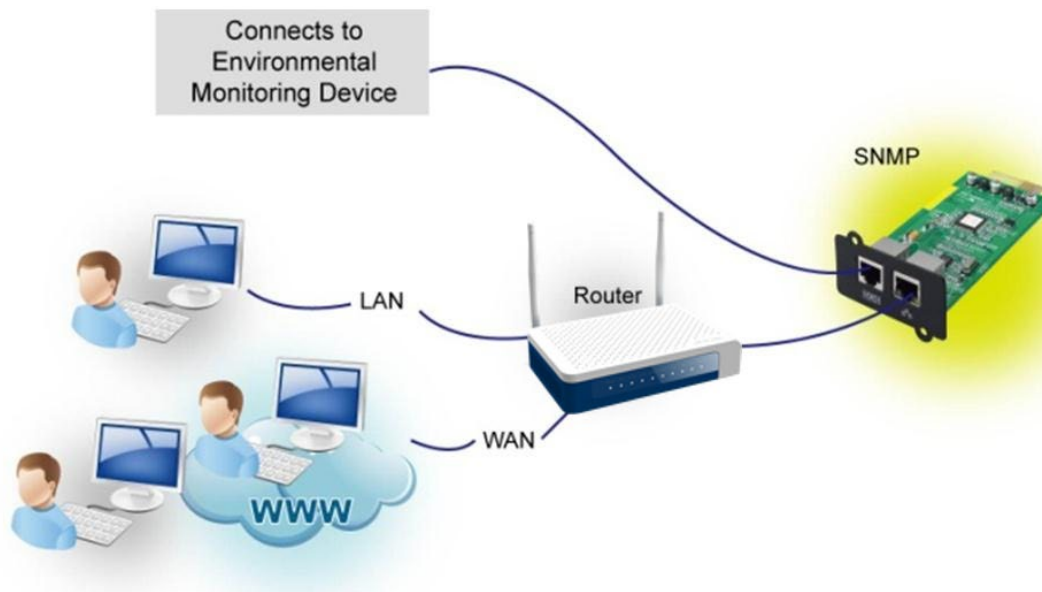

CARD

Cod: A03-SNMP1-IN

EAN: 8026974006567

Package Contents • SNMP1 Internal Card • Quick Start Guide (Italian, English) • CD-ROM with ViewPower Pro • 1 x Warranty Card



Atlantis

www.atlantis-land.com